


Шкивы для зубчатых метрических хлоропеновых ремней Тип 14М (шаг 14,00 мм)

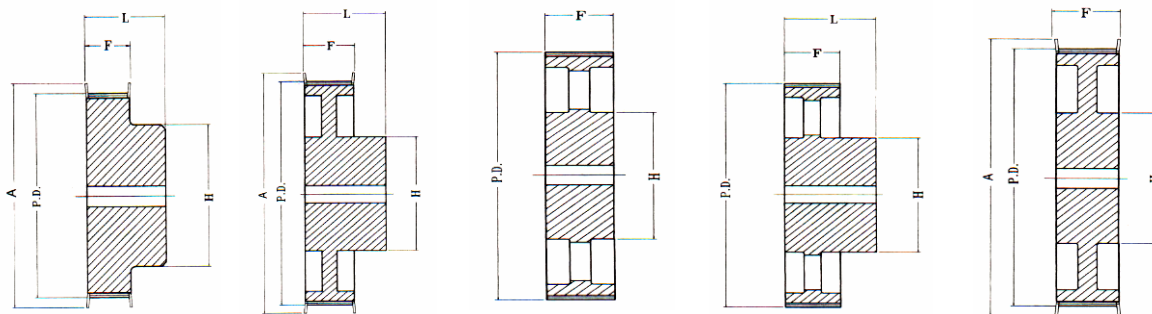

Тип 1F

Тип 2F

Тип 3

Тип 5

Тип 7F


14М40 – Для ремней шириной 40,00 мм

Кол-во зубьев	Артикул	Диаметры			Тип	Отверстие		Размеры			Вес Шкива (прим.)
		P.D.	O.D.	A (фланец)		Станд-ое	Макс-ое	H	F	L	
28	28-14М-40	124,78	122,12	141,00	1F	24	67	100,0	54,0	69,0	4,73
29	29-14М-40	129,23	126,57	141,00	1F	24	67	100,0	54,0	69,0	5,09
30	30-14М-40	133,69	130,99	156,00	1F	24	67	100,0	54,0	69,0	5,45
32	32-14М-40	142,60	139,88	156,00	1F	24	67	100,0	54,0	69,0	6,17
34	34-14М-40	151,52	148,79	165,00	1F	24	67	100,0	54,0	69,0	6,88
36	36-14М-40	160,43	157,68	173,00	1F	24	67	100,0	54,0	69,0	7,60
38	38-14М-40	169,34	166,60	182,00	1F	24	80	120,0	54,0	69,0	8,28
40	40-14М-40	178,25	175,49	191,00	1F	24	80	120,0	54,0	69,0	9,28
44	44-14М-40	196,08	193,28	209,00	1F	24	80	120,0	54,0	69,0	10,32
48	48-14М-40	213,90	211,11	227,00	2F	24	82	135,0	54,0	69,0	11,50
56	56-14М-40	249,55	246,76	264,00	2F	28	82	135,0	54,0	69,0	13,05
64	64-14М-40	285,21	282,41	298,00	2F	28	82	135,0	54,0	69,0	14,40
72	72-14М-40	320,86	318,06	-	2F	28	82	135,0	54,0	69,0	16,90
80	80-14М-40	356,51	353,71	-	2F	28	82	135,0	54,0	69,0	18,50
90	90-14М-40	401,07	398,28	-	5	28	82	135,0	54,0	69,0	20,00
112	112-14М-40	499,11	496,32	-	5	28	82	135,0	54,0	69,0	26,70
144	144-14М-40	641,71	638,92	-	5	28	82	135,0	54,0	69,0	35,00
168	168-14М-40	748,66	745,87	-	5	28	82	135,0	54,0	69,0	44,20
192	192-14М-40	855,62	852,82	-	5	28	82	135,0	54,0	69,0	52,20
216	216-14М-40	962,57	959,76	-	5	28	90	150,0	54,0	69,0	60,00


14М55 – Для ремней шириной 55,00 мм

Кол-во зубьев	Артикул	Диаметры			Тип	Отверстие		Размеры			Вес Шкива (прим.)
		P.D.	O.D.	A (фланец)		Станд-ое	Макс-ое	H	F	L	
28	28-14М-55	124,78	122,12	141,00	1F	24	67	100,0	70,0	85,0	5,60
29	29-14М-55	129,23	126,57	141,00	1F	24	67	100,0	70,0	85,0	6,10
30	30-14М-55	133,69	130,99	156,00	1F	24	67	100,0	70,0	85,0	6,60
32	32-14М-55	142,60	139,88	156,00	1F	24	67	100,0	70,0	85,0	7,60
34	34-14М-55	151,52	148,79	165,00	1F	24	67	100,0	70,0	85,0	8,60
36	36-14М-55	160,43	157,68	173,00	1F	24	67	100,0	70,0	85,0	9,60
38	38-14М-55	169,34	166,60	182,00	1F	24	80	120,0	70,0	85,0	10,80
40	40-14М-55	178,25	175,49	191,00	1F	24	80	120,0	70,0	85,0	11,20
44	44-14М-55	196,08	193,28	209,00	1F	24	80	120,0	70,0	85,0	12,50
48	48-14М-55	213,90	211,11	227,00	7F	24	82	135,0	70,0	70,0	13,70
56	56-14М-55	249,55	246,76	264,00	7F	28	82	135,0	70,0	70,0	14,50
64	64-14М-55	285,21	282,41	298,00	7F	28	82	135,0	70,0	70,0	15,60
72	72-14М-55	320,86	318,06	-	7F	28	82	135,0	70,0	70,0	18,50
80	80-14М-55	356,51	353,71	-	7F	28	82	135,0	70,0	70,0	20,00
90	90-14М-55	401,07	398,28	-	3	28	82	135,0	70,0	70,0	22,60
112	112-14М-55	499,11	496,32	-	3	28	82	135,0	70,0	70,0	29,50
144	144-14М-55	641,71	638,92	-	3	28	82	135,0	70,0	70,0	39,00
168	168-14М-55	748,66	745,87	-	3	28	82	135,0	70,0	70,0	48,50
192	192-14М-55	855,62	852,82	-	3	28	82	135,0	70,0	70,0	57,80
216	216-14М-55	962,57	959,76	-	3	28	90	150,0	70,0	70,0	67,00

Размеры приведены в миллиметрах. Вес указан в килограммах.




Шкивы для зубчатых метрических хлоропеновых ремней Тип 14М (шаг 14,00 мм)

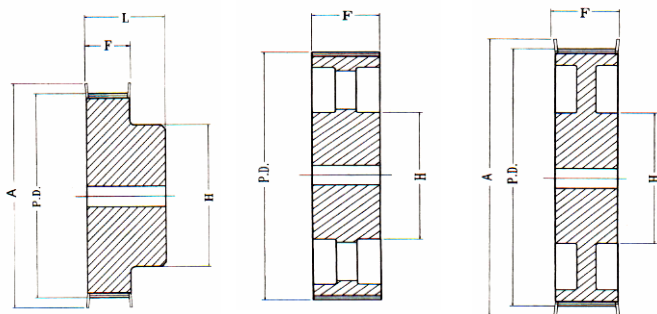

Тип 1F

Тип 3

Тип 7F



14M85 – Для ремней шириной 85,00 мм


Кол-во зубьев	Артикул	Диаметры			Тип	Отверстие		Размеры			Вес Шкива (прим.)
		P.D.	O.D.	A (фланец)		Станд-ое	Макс-ое	H	F	L	
28	28-14M-85	124,78	122,12	141,00	1F	24	67	100,0	102,0	117,0	7,70
29	29-14M-85	129,23	126,57	141,00	1F	24	67	100,0	102,0	117,0	8,40
30	30-14M-85	133,69	130,99	156,00	1F	24	67	100,0	102,0	117,0	9,10
32	32-14M-85	142,60	139,88	156,00	1F	24	67	100,0	102,0	117,0	10,50
34	34-14M-85	151,52	148,79	165,00	1F	24	67	100,0	102,0	117,0	11,90
36	36-14M-85	160,43	157,68	173,00	1F	32	67	100,0	102,0	117,0	13,20
38	38-14M-85	169,34	166,60	182,00	1F	32	80	120,0	102,0	117,0	15,15
40	40-14M-85	178,25	175,49	191,00	1F	32	90	135,0	102,0	117,0	17,10
44	44-14M-85	196,08	193,28	209,00	1F	32	90	135,0	102,0	117,0	23,30
48	48-14M-85	213,90	211,11	227,00	1F	32	100	150,0	102,0	117,0	25,00
56	56-14M-85	249,55	246,76	264,00	7F	32	90	150,0	102,0	102,0	25,00
64	64-14M-85	285,21	282,41	298,00	7F	32	90	150,0	102,0	102,0	28,20
72	72-14M-85	320,86	318,06	-	7F	32	90	150,0	102,0	102,0	30,80
80	80-14M-85	356,51	353,71	-	7F	32	90	150,0	102,0	102,0	33,10
90	90-14M-85	401,07	398,28	-	3	32	90	150,0	102,0	102,0	38,00
112	112-14M-85	499,11	496,32	-	3	32	90	150,0	102,0	102,0	45,80
144	144-14M-85	641,71	638,92	-	3	32	90	150,0	102,0	102,0	58,40
168	168-14M-85	748,66	745,87	-	3	32	90	150,0	102,0	102,0	68,30
192	192-14M-85	855,62	852,82	-	3	32	100	165,0	102,0	102,0	80,20
216	216-14M-85	962,57	959,76	-	3	32	100	165,0	102,0	102,0	91,00

14M115 – Для ремней шириной 115,00 мм


Кол-во зубьев	Артикул	Диаметры			Тип	Отверстие		Размеры			Вес Шкива (прим.)
		P.D.	O.D.	A (фланец)		Станд-ое	Макс-ое	H	F	L	
28	28-14M-115	124,78	122,12	141,00	1F	32	67	100,0	133,0	148,0	9,20
29	29-14M-115	129,23	126,57	141,00	1F	32	67	100,0	133,0	148,0	10,20
30	30-14M-115	133,69	130,99	156,00	1F	32	67	100,0	133,0	148,0	11,20
32	32-14M-115	142,60	139,88	156,00	1F	32	67	100,0	133,0	148,0	13,20
34	34-14M-115	151,52	148,79	165,00	1F	32	67	100,0	133,0	148,0	14,80
36	36-14M-115	160,43	157,68	173,00	1F	32	80	120,0	133,0	148,0	16,60
38	38-14M-115	169,34	166,60	182,00	1F	32	80	120,0	133,0	148,0	19,20
40	40-14M-115	178,25	175,49	191,00	1F	32	90	135,0	133,0	148,0	20,56
44	44-14M-115	196,08	193,28	209,00	1F	32	85	140,0	133,0	148,0	26,00
48	48-14M-115	213,90	211,11	227,00	1F	32	90	150,0	133,0	148,0	30,00
56	56-14M-115	249,55	246,76	264,00	1F	32	90	150,0	133,0	148,0	36,00
64	64-14M-115	285,21	282,41	298,00	7F	32	90	150,0	133,0	133,0	39,00
72	72-14M-115	320,86	318,06	-	7F	32	90	150,0	133,0	133,0	32,83
80	80-14M-115	356,51	353,71	-	7F	32	90	150,0	133,0	133,0	35,55
90	90-14M-115	401,07	398,28	-	3	32	90	150,0	133,0	133,0	41,00
112	112-14M-115	499,11	496,32	-	3	32	90	150,0	133,0	133,0	54,40
144	144-14M-115	641,71	638,92	-	3	32	100	165,0	133,0	133,0	67,80
168	168-14M-115	748,66	745,87	-	3	32	100	165,0	133,0	133,0	75,80
192	192-14M-115	855,62	852,82	-	3	32	100	165,0	133,0	133,0	90,30
216	216-14M-115	962,57	959,76	-	3	32	100	165,0	133,0	133,0	105,00

Размеры приведены в миллиметрах. Вес указан в килограммах.

ЗУБЧАТЫЕ ШКИВЫ БЕЗ ВТУЛОК




Шкивы для зубчатых метрических хлоропеновых ремней Тип 14М (шаг 14,00 мм)

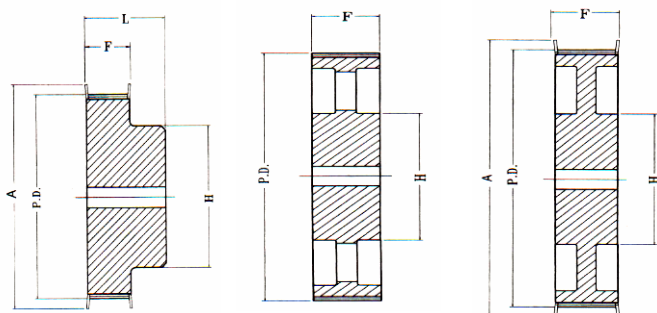

Тип 1F

Тип 3

Тип 7F



14М170 – Для ремней шириной 170,00 мм

Кол-во зубьев	Артикул	Диаметры			Тип	Отверстие		Размеры			Вес Шкива (прим.)
		P.D.	O.D.	A (фланец)		Станд-ое	Макс-ое	H	F	L	
28	28-14М-170	124,78	122,12	141,00	1F	32	67	100,0	187,0	202,0	13,80
29	29-14М-170	129,23	126,57	141,00	1F	32	67	100,0	187,0	202,0	14,20
30	30-14М-170	133,69	130,99	156,00	1F	32	67	100,0	187,0	202,0	15,60
32	32-14М-170	142,60	139,88	156,00	1F	32	67	100,0	187,0	202,0	18,10
34	34-14М-170	151,52	148,79	165,00	1F	32	67	100,0	187,0	202,0	20,40
36	36-14М-170	160,43	157,68	173,00	1F	32	80	120,0	187,0	202,0	23,50
38	38-14М-170	169,34	166,60	182,00	1F	32	90	135,0	187,0	202,0	26,50
40	40-14М-170	178,25	175,49	191,00	1F	32	94	140,0	187,0	202,0	30,10
44	44-14М-170	196,08	193,28	209,00	1F	32	95	160,0	187,0	202,0	37,80
48	48-14М-170	213,90	211,11	227,00	1F	32	95	160,0	187,0	202,0	44,50
56	56-14М-170	249,55	246,76	264,00	1F	32	95	160,0	187,0	202,0	61,00
64	64-14М-170	285,21	282,41	298,00	1F	32	108	180,0	187,0	202,0	81,00
72	72-14М-170	320,86	318,06	-	7	32	108	180,0	187,0	187,0	61,40
80	80-14М-170	356,51	353,71	-	7	32	108	180,0	187,0	187,0	65,00
90	90-14М-170	401,07	398,28	-	7	38	108	180,0	187,0	187,0	68,00
112	112-14М-170	499,11	496,32	-	3	38	108	200,0	187,0	187,0	87,50
144	144-14М-170	641,71	638,92	-	3	38	108	220,0	187,0	187,0	114,80
168	168-14М-170	748,66	745,87	-	3	38	108	220,0	187,0	187,0	125,00
192	192-14М-170	855,62	852,82	-	3	38	108	220,0	187,0	187,0	136,40
216	216-14М-170	962,57	959,76	-	3	38	108	220,0	187,0	187,0	147,00

Размеры приведены в миллиметрах. Вес указан в килограммах.